20-T-25 Flat Offset Drilling Attachment (short handle)

With 10-32 or 1/4" - 28 Threaded Spindle

The 2-5/16" offset gives greater access to tight places. Needle Bearings in the Handle, hardened Alloy Steel Drive Shaft and Gears make this a very durable tool.

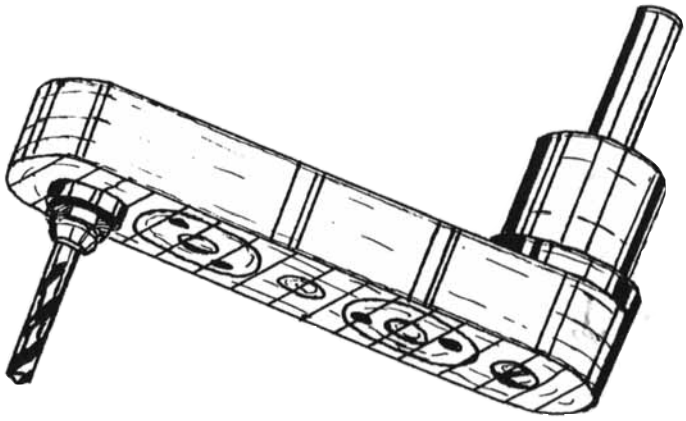

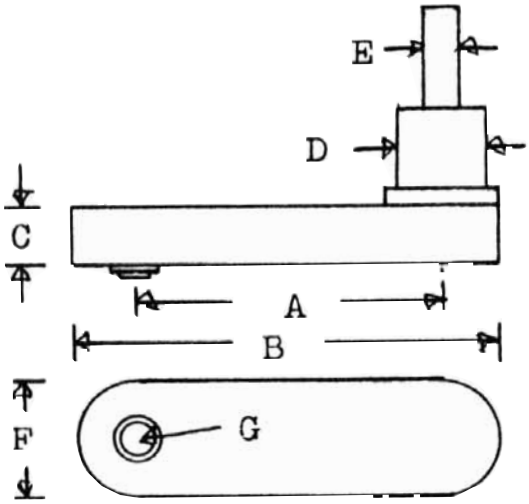

Part No.	Description
T-25-A	Front Spindle Bearing
T-25-B	Spindle Gear (10-32 or 1/4"-28 thread)
T-25-D	Drive Shaft Gear
T-25-ID	Idler Gear (3 per tool)
T-25-DS	Drive Shaft
T-25-DSX	Drive Shaft & Gear Assembly
T-25-E	Gear Case (head)
T-25-BP	Cover for Spindle Gear
T-25-IP	Cover for Idler Gear
T-25-H	Handle
T-25-NB	Needle Bearing
T-25-Wrench	(for opening covers)

Dimensions

A: 2-5/16"
B: 3-3/16"
C: 7/16"
D: 11/16"
E: 1/4"
F: 7/8"
G: 10-32 or 1/4" - 28 Thread

Capacity: 1/4" Maximum

USATCO U.S. Air Tool Company, Inc.

Eastern Division . . . . . .60 Fleetwood Ct., Ronkonkoma, NY 11779-6951 tel: **(631) 471-3300** fax: **(631) 471-3308**

Western Division . . . . . .1219 W. Mahalo Place, Rancho Dominguez, CA 90220-5446 tel: **(310) 632-5400** fax: **(310) 632-3900**